



Krantz Components

Adjustable radial outlet
with core tube RA-V2....

Air distribution systems



Krantz

Adjustable radial outlet with core tube RA-V2

Preliminary remark

The adjustable radial outlet RA-V2 of Krantz Components generates turbulent mixing ventilation and is well suited for installation flush with the ceiling or freely suspended, especially in case of large thermal load variations in commercial or industrial applications as well as for great room heights.

The direction of the supply air jets is adjustable from horizontal to vertical (downwards) depending on the supply air temperature. Adjustment occurs via a built-in damper controlled by a self-acting thermostatic control unit, an electric actuator, or a manual device.

Mode of operation

The radial vanes generate a diffuse air flow according to the principle of turbulent mixing ventilation. In cooling mode the supply air is discharged horizontally with high-turbulence air jets that induce indoor air. This leads to rapid temperature equalization of supply air and indoor air as well as to a quick decrease in jet velocity. Thus, the adjustable radial outlet with core tube achieves a high level of thermal comfort.

For heating, a support jet is generated via an adjustable damper built into the core tube; this support jet adjusts the discharge direction of the whole supply air continuously from horizontal (cooling mode) to vertical (heating mode).

RA-V2 outlets can be installed flush with the ceiling or freely suspended.

When used in HVAC systems without cooling (e.g. in industrial spaces), if indoor air temperatures are high, vertical air discharge may be appropriate to achieve higher air velocities.

Air outlet data

Nom. Ø	Volume flow rate range				Dis- charge height H	Max. temperature difference supply air–indoor air $\Delta\vartheta$	
	\dot{V}_{\min}		\dot{V}_{\max}				
DN	l/s	m ³ /h	l/s	m ³ /h		Cooling mode K	Heating mode K
250	111	400	389	1 400	2.8 – 6	-12	+12
315	167	600	611	2 200	3 – 8		
355	222	800	833	3 000	3 – 9		
400	278	1 000	1 055	3 800	3 – 12		
500	444	1 600	1 390	5 000	4 – 12		
630	694	2 500	2 500	9 000	5 – 13		
710	972	3 500	3 056	11 000	5 – 14		
900	1 667	6 000	4 444	16 000	6 – 15		

Construction design

The adjustable radial outlet **1** has a circular or square face and is made of powder coated sheet metal.

The core tube **2** is fitted with an adjustable damper **3**, a jet straightener **4** and a collar **5**. The underside of the fixed radial vanes **6** is flush with the outlet face. The radial discharge of the supply air is enhanced by the slanting exit **7**.



Fig. 1: Adjustable radial outlet RA-V2 with electric actuator

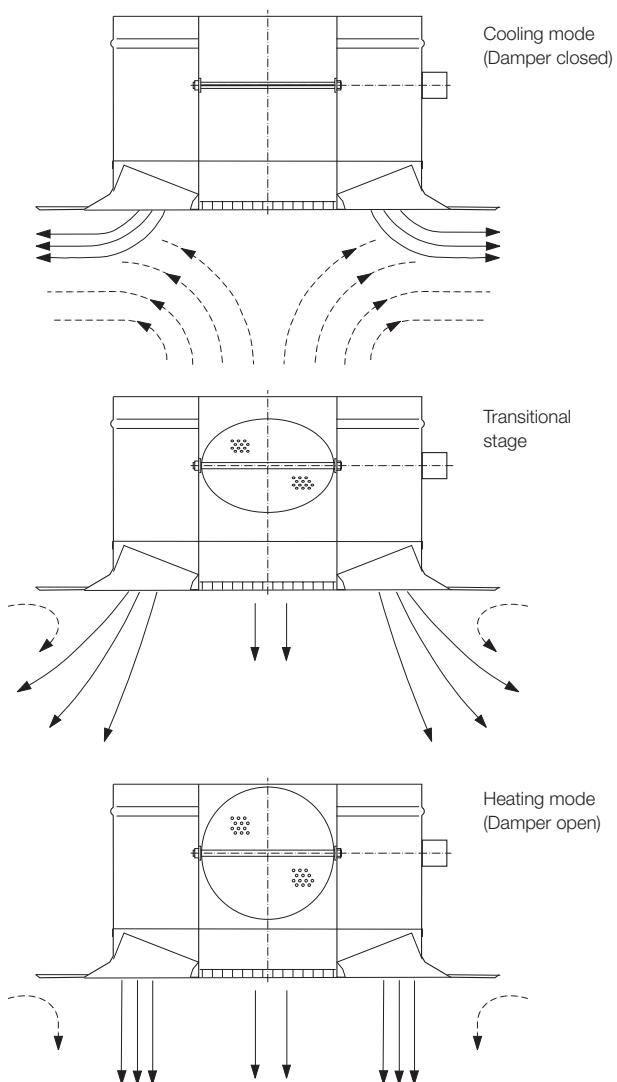


Fig. 2: Jet spread at different positions of the adjustable damper, shown here with electric actuator

Adjustable radial outlet with core tube RA-V2

The discharge direction is adjusted either via a thermostatic control unit **8** built into the radial outlet, or via an electric actuator **9** or a manual adjusting device **10**, each being positioned on the housing outer surface.

As an option, the outlet can be fitted with a perforated plate **4a** in order to enable quicker heating-up in very high rooms.



Horizontal jet
when cooling



Vertical jet
when heating

Fig. 3: Jet spread when cooling and heating, made visible by smoke tracer

Self-acting thermostatic control unit for alteration of discharge direction

The thermostatic control unit includes a self-acting element containing expandable material; in response to the supply air temperature it alters the discharge direction from horizontal when cooling to vertical when heating.

At supply air temperatures below 22 °C we usually have the cooling mode; the supply air is discharged horizontally. In the isothermal range from 22 °C to 24 °C the supply air is discharged at a slight downward incline. Above 24 °C we mainly have the heating mode; the supply air is then discharged at a steeper downward incline, and even vertically downwards above 28 °C.

For electrical adjustment the radial outlets must be equipped with actuators. The direction of the supply air jets is adjusted to the prevailing load on the basis of the measured supply and indoor air temperatures, using the building management system (BMS) and an appropriate control graph.

Thermostatic control obviates the need for a central control system and outlet wiring. Each adjustable radial outlet is fitted with a thermostatic control unit which gets energy for damper adjustment

from the supply air temperature. The thermostatic control unit, which is filled with expandable material, is available for two supply air temperature ranges: T1 from 20 to 28 °C and T2 from 16 to 28 °C. Another advantage of this unit is that the supply air temperature is measured inside the air outlet, not at a central point such as behind the HVAC system. With a long ductwork, for instance, significant temperature differences are likely to occur and to impair both thermal comfort and heating-up periods; this is precluded by the thermostatic control unit.

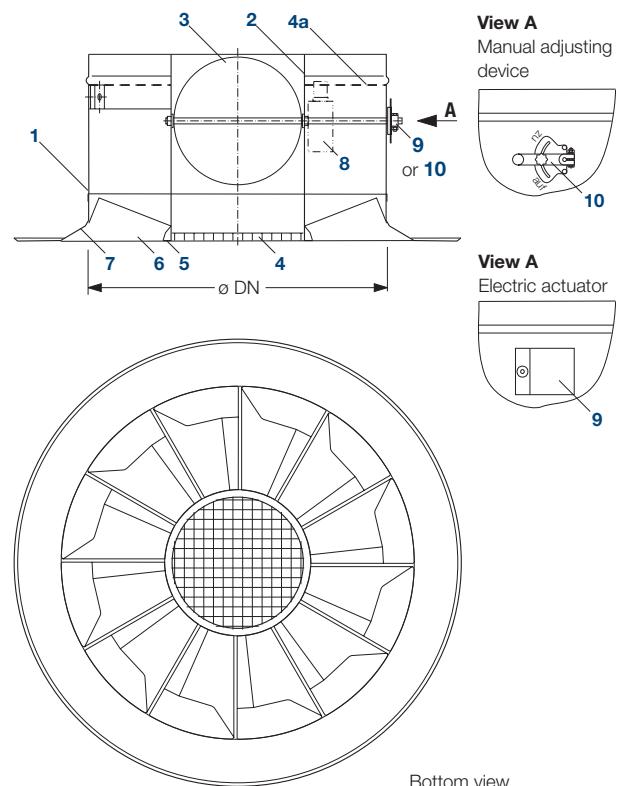


Fig. 4: Adjustable radial outlet RA-V2

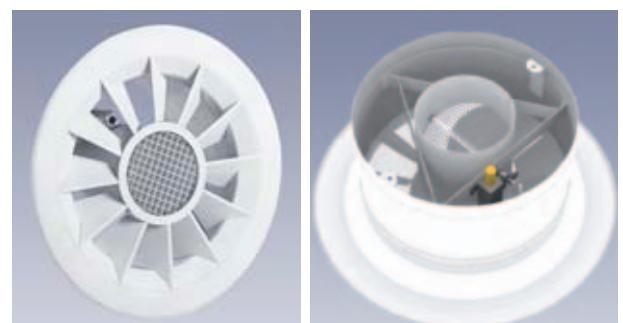


Fig. 5: Adjustable radial outlet RA-V2 with thermostatic control unit

Adjustable radial outlet with core tube RA-V2

Connection types

The adjustable radial outlet RA-V2 can be connected to the duct system either directly by the spigot **11** or via a connection box **12** available for outlets up to DN 710.

Connection to a circular duct

The adjustable radial outlet is fastened to the circular duct on site either directly or, for installation flush with ceiling, via a crossbar **12a** available as accessory. Screwing is then made from the outlet underside through the openings between the vanes. The spigot and the crossbar suit circular ducts to EN 1506.

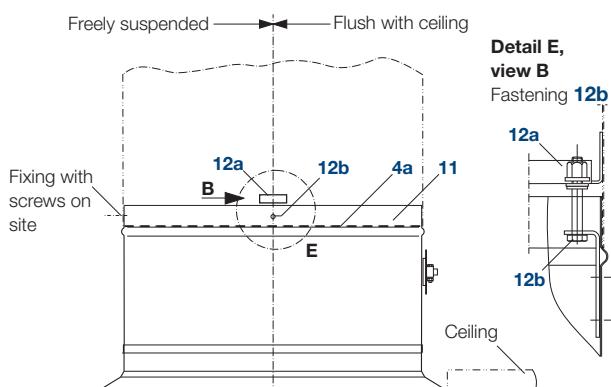



Fig. 6: Example of connection to circular duct



Fig. 7: Adjustable radial outlet RA-V2 with connection box

Connection to a connection box

The adjustable radial outlet is inserted into the sleeve **12c** of the connection box and screwed to the crossbar of this box with fastening screws **12b**. The connection box is fixed to the ceiling either via quick fasteners or via threaded rods (M8 with lock nuts) which are to be provided by the client. The optional volume flow damper **15** can be ordered with adjustment from the room or at the connection spigot.

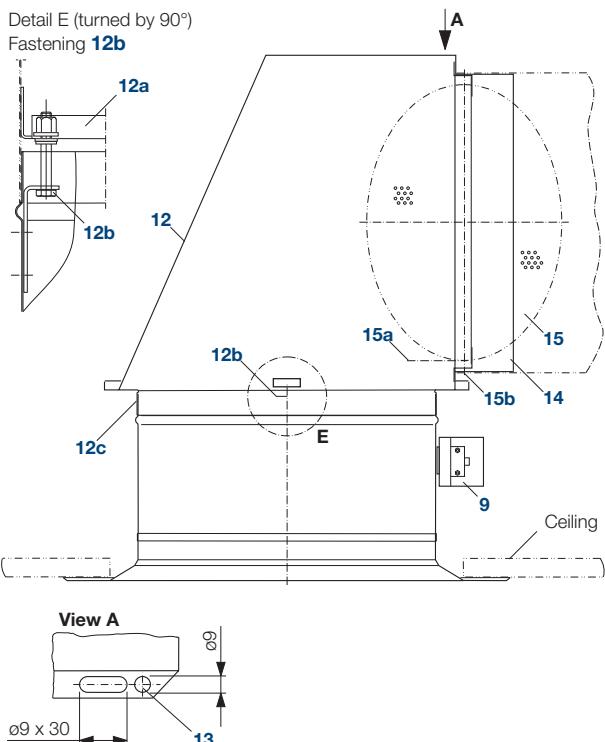


Key for all pages

- | | | | |
|----|-----------------------------|-----|--|
| 1 | Adjustable radial outlet | 11 | Spigot |
| 2 | Core tube | 12 | Connection box |
| 3 | Adjustable damper | 12a | Crossbar (optional) |
| 4 | Jet straightener | 12b | Fastening screws M8 |
| 4a | Perforated plate (optional) | 12c | Sleeve |
| 5 | Collar | 13 | Bore for suspension with quick fastener or threaded rod M8 |
| 6 | Vane | 14 | Connection spigot |
| 7 | Slanting exit | 15 | Volume flow damper (optional) |
| 8 | Thermostatic control unit | 15a | Adjustment from room up to DN 500 |
| 9 | Electric actuator | 15b | Adjustment at spigot for DN 630 and DN 710 |
| 10 | Manual adjusting device | | |


Adjustable radial outlet with core tube RA-V2

Dimensions





Connection to circular duct – with circular face

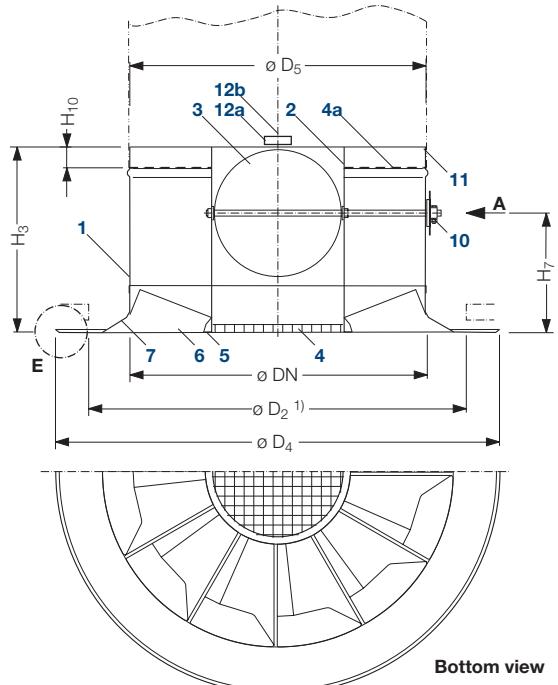


Connection to connection box

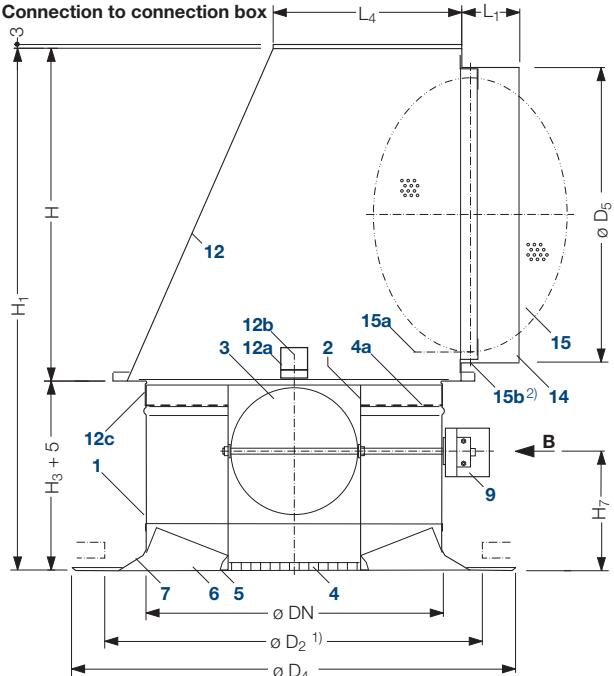

– with square face

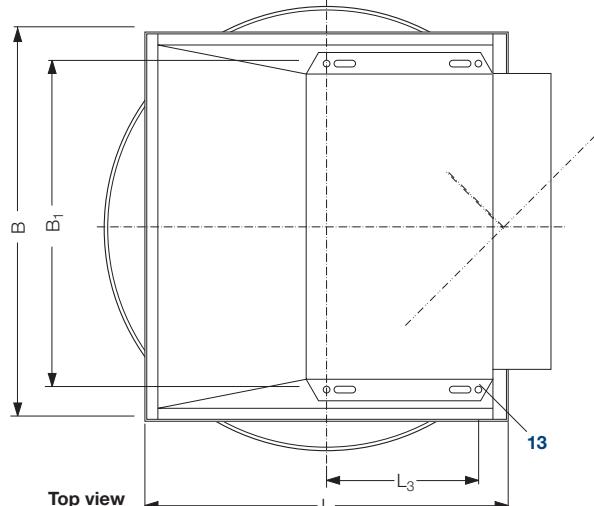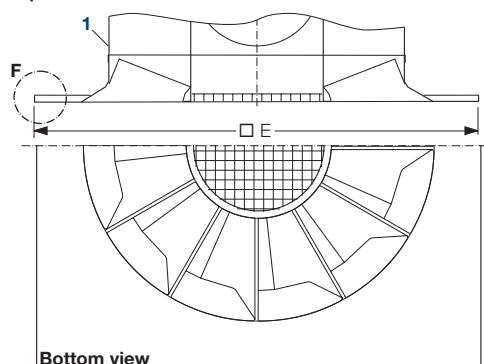

View A – Manual adjusting device
zu = closed; auf = open



View B
Electric actuator

Nom. ø	Dimensions in mm												RA-V2-RS W in kg ³⁾ ① ②	RA-V2-Q1 W in kg ³⁾ □ E ① ②			RA-V2-Q2 W in kg ³⁾ □ E ① ②			
	D ₂ ¹⁾	D ₄	D ₅	H	H ₁	H ₃	H ₇	H ₁₀	L	B	B ₁	L ₁	L ₃	L ₄	□ E	①	②	□ E	①	②
DN 250	325	375	249	300	505	200	127	30	350	375	298	60	135	180	3.8	8.0		6.0	10.2	
DN 315	420	470	314	365	587	217	141	30	415	445	357	60	168	213	5.2	11.2	595	6.9	12.9	6.9
DN 355	460	530	354	405	640	230	151	30	455	485	390	60	188	233	6.2	13.5		7.5	14.8	7.5
DN 400	500	600	399	450	705	250	161	35	500	535	432	80	210	255	7.5	16.6		8.3	17.4	8.3
DN 500	600	750	499	550	849	294	183	40	600	645	525	80	260	305	10.6	23.9		—	—	—
DN 630	760	945	628	680	1 035	350	211	50	730	785	642	80 ²⁾	325	370	16.0	35.3	620	—	—	—
DN 710	860	1 065	708	760	1 150	385	229	50	810	870	713	100 ²⁾	365	410	19.8	44.8		—	—	—
DN 900	1 100	1 350	898	—	—	472	272	50	—	—	—	—	—	—	29.6	—	—	—	—	—

¹⁾ Ceiling cutout

²⁾ With DN 630 and DN 710 dimension L₁ = 160 mm with optional volume flow damper

³⁾ Weight inclusive of electric actuator or thermostatic control unit;

① Air outlet; ② Air outlet with connection box

Adjustable radial outlet with core tube RA-V2


Comfort criteria

Comfort criteria 1)

The outlet layout must comply with the maximum allowable indoor air velocities u in the occupied zone in cooling mode. The indoor air velocity depends on the cooling load that is to be removed from the room. The maximum specific cooling capacity q depends on the discharge height and the maximum allowable indoor air velocity u (Graph 1).

Graph 1 enables to determine for the cooling mode the maximum specific volume flow rate $\dot{V}_{Sp\ max}$ in relation to the maximum specific cooling capacity and the maximum temperature difference $\Delta\vartheta_{max}$. The volume flow rate supplied to the room $\dot{V}_{Sp\ act}$ may not exceed this value.

Graph 2 enables to determine the minimum centre spacing between two outlets on the basis of the maximum specific volume flow rate.

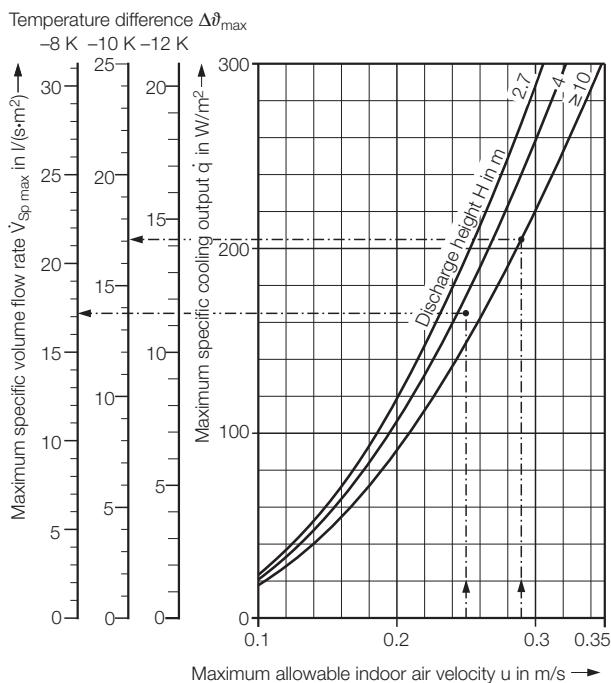

Graph 1: Maximum specific volume flow rate

Key for layout:


\dot{V}_A	= volume flow rate per air outlet in l/s
$\dot{V}_{A\ max}$	= max. volume flow rate per air outlet when cooling in l/s
$\dot{V}_{A\ min}$	= min. volume flow rate per air outlet when cooling in l/s
$\dot{V}_{A\ min\ H}$	= min. volume flow rate per air outlet in l/s, when heating, with $\Delta\vartheta = ..K$
$\dot{V}_{Sp\ max}$	= max. specific volume flow rate per m² in l/(s·m²)
$\dot{V}_{Sp\ act}$	= actual specific volume flow rate per m² of floor area in l/(s·m²)
u	= max. allowable indoor air velocity in m/s
q	= max. specific cooling capacity in W/m²
$\Delta\vartheta_{max}$	= max. temperature difference supply air to return air in K
t_{min}	= minimum air outlet centre spacing in m
H	= discharge height in m
L_{WA}	= sound power level in dB(A) ref. 10^{-12} W
Δp_t	= total pressure drop in Pa
RV	= duct connection, vertical discharge
RH	= duct connection, horizontal discharge
KV	= connection box, vertical discharge
KH	= connection box, horizontal discharge

Layout examples	Super-market	Exhibition Hall
Size	DN 250	DN 710
Connection type	Duct connection	Duct connection
1 Supply air volume flow rate \dot{V}	l/s	5 550 200 000
2 Discharge height H	m	5 10
3 Floor area A	m²	645 14 000
4 Max. allowable sound power level $L_{WA\ dB(A)}$ ref. 10^{-12} W		55 65
5 Max. temperature difference supply air to return air: $\Delta\vartheta_{Cooling}$	K	-8 -10
$\Delta\vartheta_{Heating}$	K	+6 +5
6 Comfort criteria		
- Max. allowable indoor air velocity u	m/s	0.25 0.29
- Max. specific volume flow rate $\dot{V}_{Sp\ max}$	l/(s·m²)	17 17
- Actual specific volume flow rate $\dot{V}_{Sp\ act}$ [from 1 : 3]	l/(s·m²)	8.6 14.2
Criterion is met if $\dot{V}_{Sp\ act} < \dot{V}_{Sp\ max}$		
7 $\dot{V}_{A\ min\ H}$	l/s	[Graph p. 7] 120 [at $\Delta\vartheta = 6$ K] 2 080 [at $\Delta\vartheta = 5$ K]
8 Z selected	units	25 90
9 \dot{V}_A [$\dot{V} : Z$]	l/s	[Graph p. 7] 220 [Graph p. 9]
10 $L_{WA\ max}$	dB(A)	52 59
11 $\Delta p_t\ max$	Pa	62 100
12 t_{min} [Graph 2, p. 7]	m	≈ 3.6 ≈ 11.4


¹⁾ See our brochure ref. TB 69 'Layout specifications for thermal comfort'

Adjustable radial outlet with core tube RA-V2

Air outlet centre spacing and layout sheet for DN 250



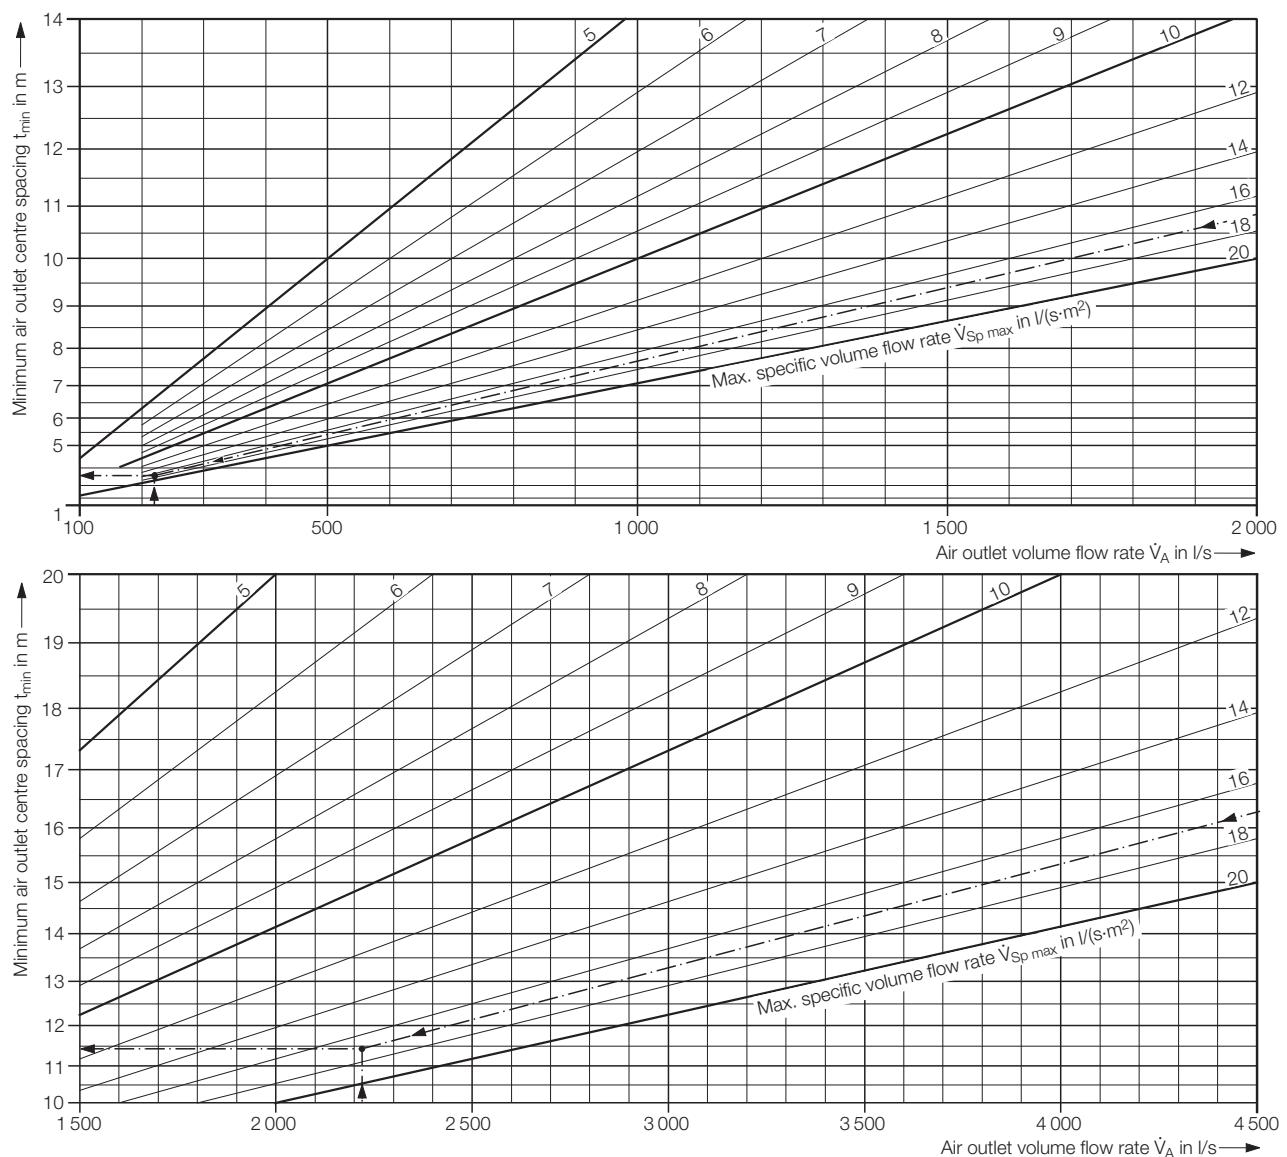


Graph 2: Minimum air outlet centre spacing

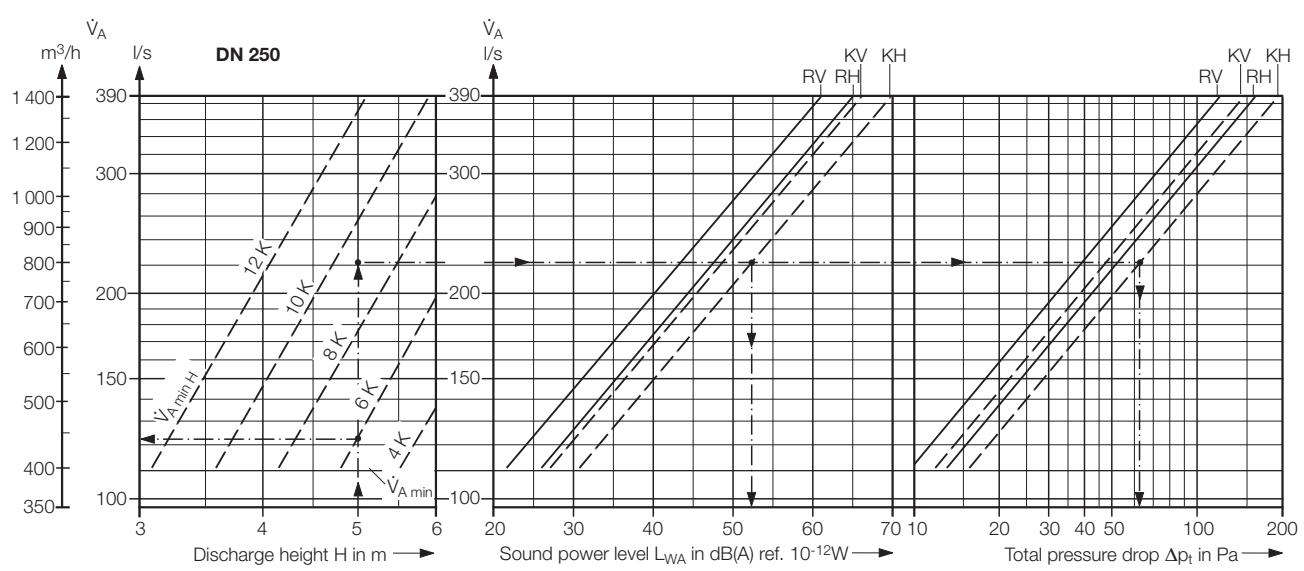


Adjustable radial outlet with core tube RA-V2

Layout sheet for DN 315 to DN 400

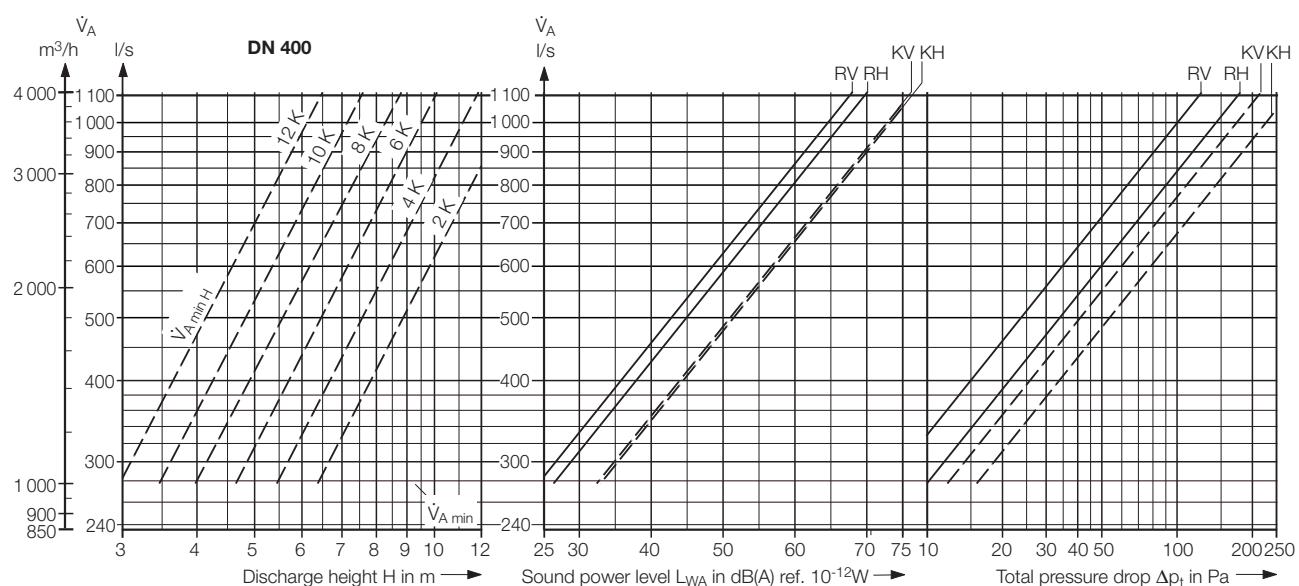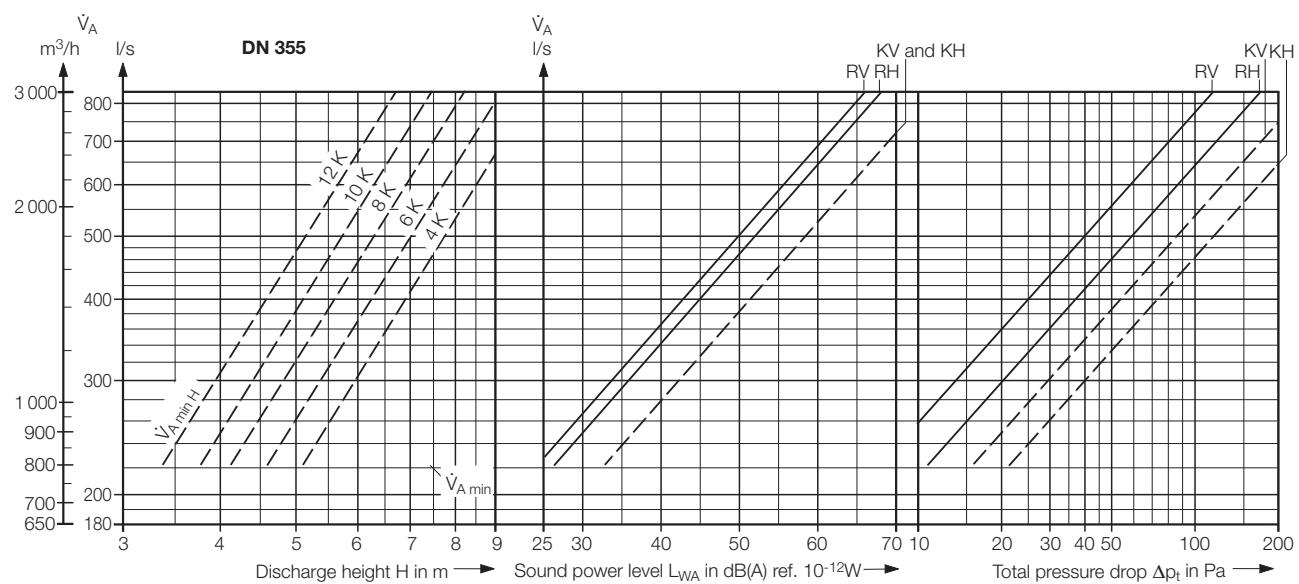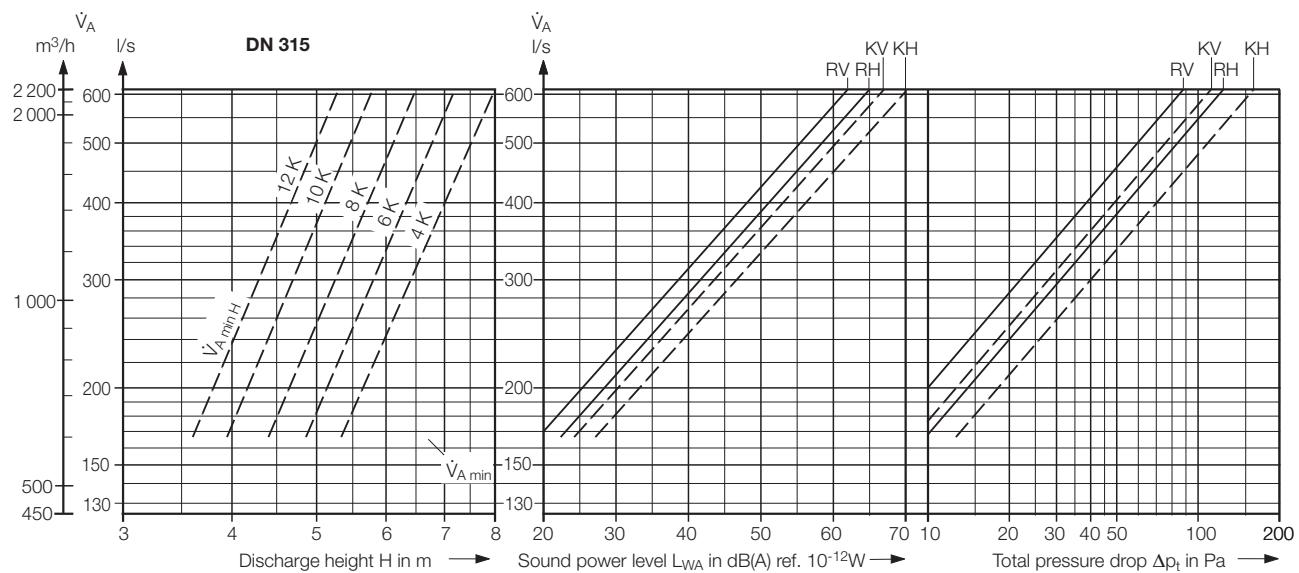


Adjustable radial outlet with core tube RA-V2

Layout sheet for DN 500 to DN 710

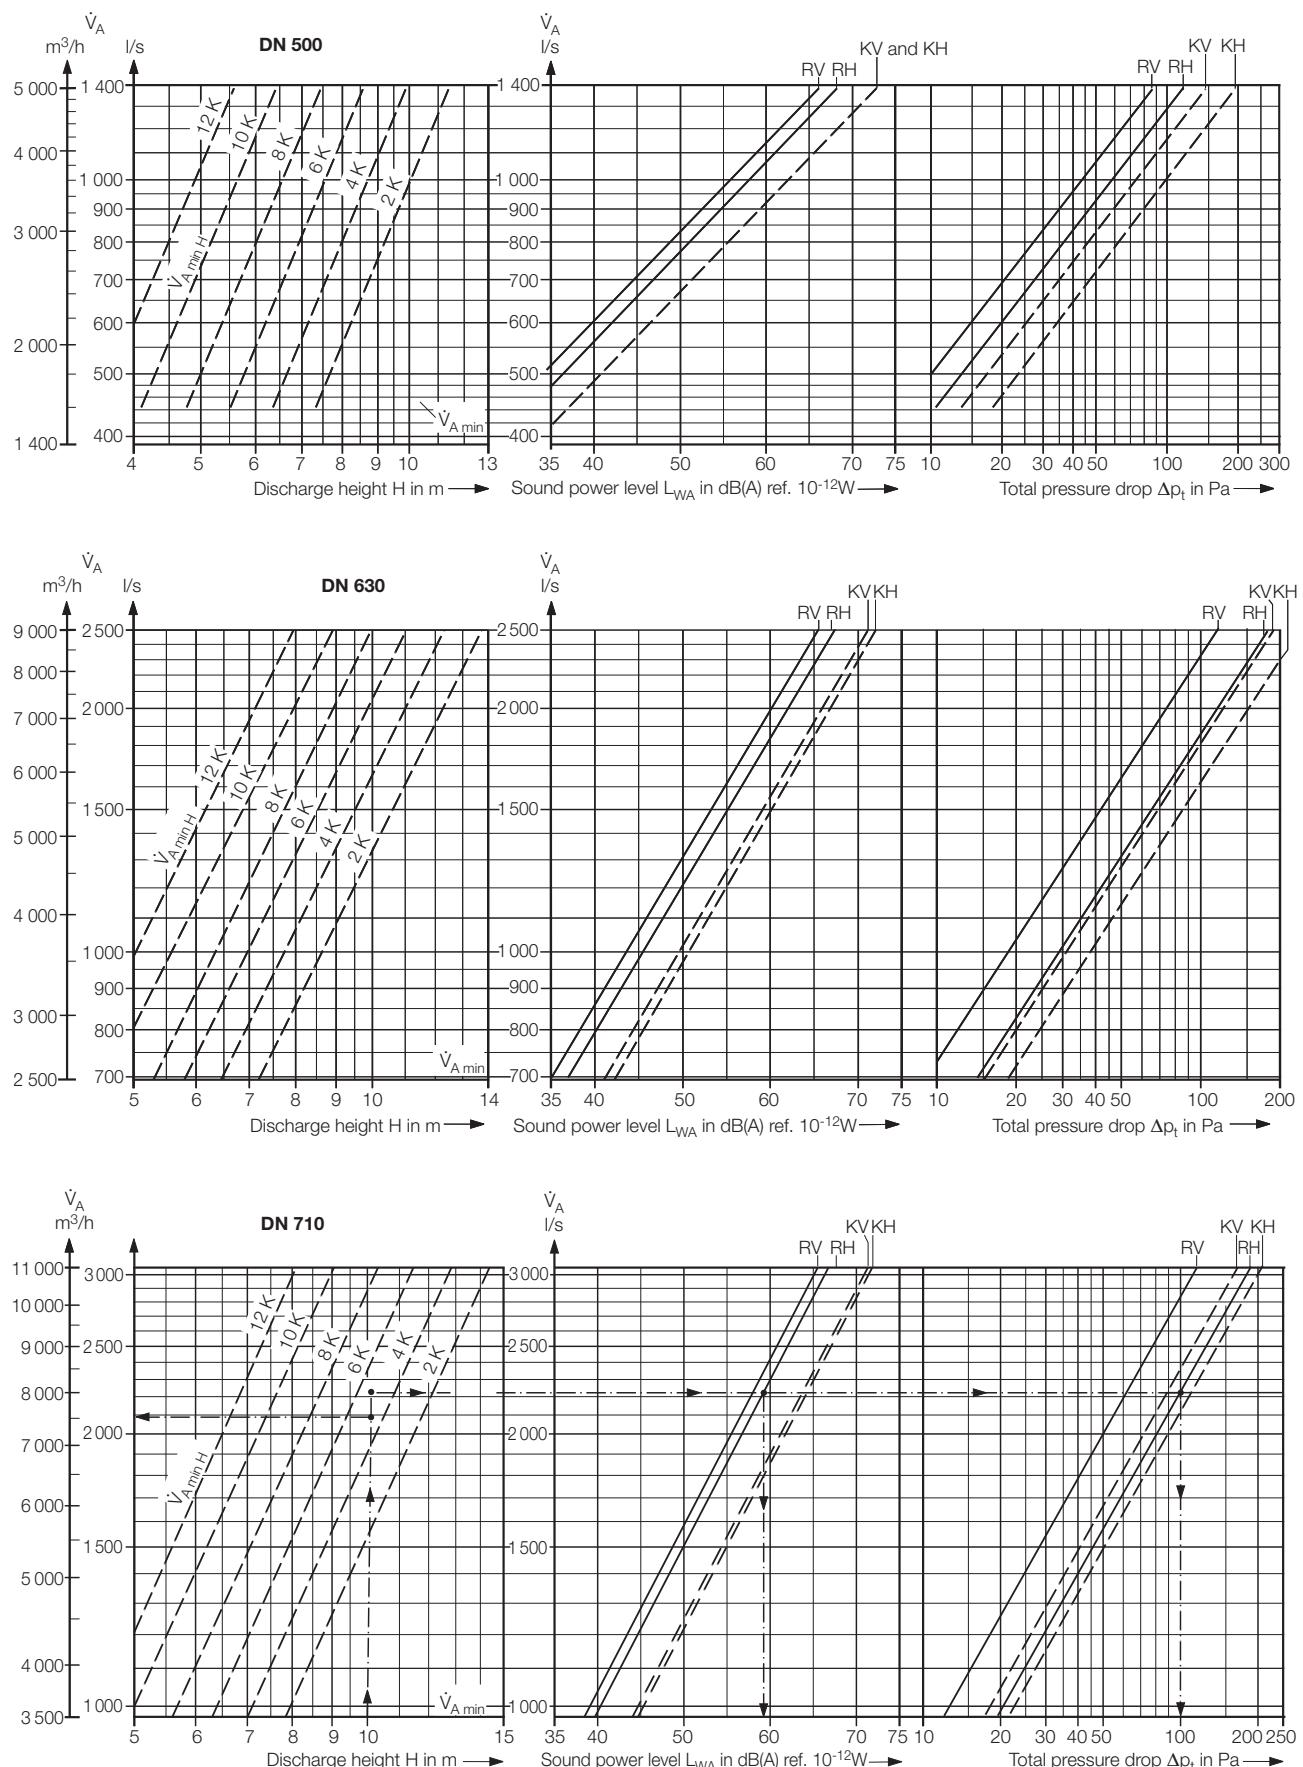

Adjustable radial outlet with core tube RA-V2

Layout sheet for DN 900 and correction tables

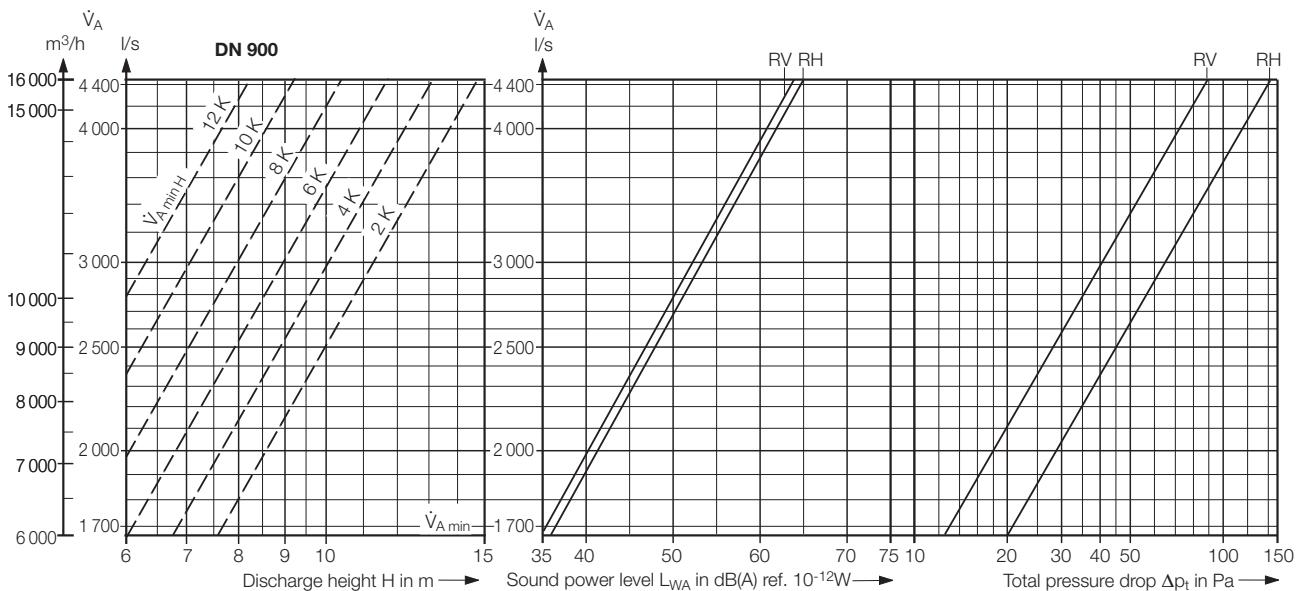

Correction table 1: Jet penetration depth in heating mode as well as sound power level and pressure drop for optional outlet design with perforated plate above vanes

Nom. ø	Connec-tion type	Discharge height H Factor	Sound power level increase ¹⁾ L_{WA} in dB(A) ref. $10^{-12}W$	Pressure drop increase ¹⁾ Δp_t – Factor
DN 400	RH	—	2	1.45
	RV	1.4	2	1.45
	KH	—	0	1.20
	KV	1.4	0	1.20
DN 500	RH	—	2	1.35
	RV	1.4	2	1.25
	KH	—	0	1.20
	KV	1.4	0	1.20
DN 630	RH	—	2	1.20
	RV	1.4	2	1.30
	KH	—	0	1.20
	KV	1.4	0	1.20
DN 710	RH	—	2	1.25
	RV	1.4	2	1.25
	KH	—	0	1.20
	KV	1.4	0	1.20
DN 900	RH	—	3	1.40
	RV	1.4	3	1.40

Note:

If the air outlet is fitted with a perforated plate to increase the jet penetration depth, the sound power level is not further increased by the self-acting thermostatic control unit.

Correction table 2: Adjustable radial outlet RA-V2 with self-acting thermostatic control unit

Nom. ø	Sound power level increase ¹⁾ L_{WA} in dB(A) ref. $10^{-12}W$	Pressure drop increase ¹⁾ Δp_t – Factor
DN 250	+ 1 to 5	1.40
DN 315	+ 1 to 3	1.30
DN 355	+ 1	1.15
DN 400	0	1.05
DN 500	0	1.00
DN 630	0	1.00
DN 710	0	1.00
DN 900	0	1.00

Example of jet penetration depth for air outlet with optional perforated plate (index 'LB'): RA-V2RS – DN 900 – R

\dot{V}_A : 4 167 l/s [15 000 m^3/h]

$\Delta\theta$: +8 K

H: $H_{LB} = H \times \text{factor} = 10 \text{ m} \times 1.4 = 14 \text{ m}$

(see example in graph above and [correction table 1](#))

Increase: $\Delta p_{LB} = \Delta p_t \times \text{factor} = 80 \text{ Pa} \times 1.4 = 112 \text{ Pa}$
 $L_{W LB} = L_w + 3 \text{ dB(A)} = 62 \text{ dB(A)} + 3 = 65 \text{ dB(A)}$

¹⁾ Increase depending on volume flow rate

Adjustable radial outlet with core tube RA-V2

Sound power level and total pressure drop

Air outlet volume flow rate \dot{V}_A		For duct connection	Total pressure drop Δp_t	Sound power level L_W in dB ref. 10^{-12} W												With connection box	Total pressure drop Δp_t	Sound power level L_W in dB ref. 10^{-12} W												
l/s	m ³ /h			L_{WA} dB(A)	63	125	250	500	1 K	2 K	4 K	8 K	L_{WA} dB(A)	63	125	250	500	1 K	2 K	4 K	8 K	L_{WA} dB(A)	63	125	250	500	1 K	2 K	4 K	8 K
DN 250																														
167	600	RH RV	30 22	38	36	40	38	37	32	27	17	—	KH KV	36 27	43 40	41 35	46 42	43 41	43 39	37 35	32 30	22 20	12 10							
278	1 000	RH RV	82 61	54 51	52 44	55 49	53 48	52 47	49 45	45 42	41 30	—	KH KV	99 74	59 56	57 49	60 54	58 53	57 52	55 50	50 50	46 44	40 34							
389	1 400	RH RV	160 120	65 61	62 52	64 56	62 55	60 56	57 56	57 53	51 42	—	KH KV	191 142	70 66	67 57	69 61	66 59	66 59	62 61	61 59	57 58	57 47							
DN 315																														
278	1 000	RH RV	27 18	39	40	46	40	38	33	28	17	12	KH KV	34 23	44 41	45 37	51 44	45 42	43 40	38 36	33 31	22 17	13 —							
444	1 600	RH RV	69 47	55 52	50 44	58 54	54 48	51 49	50 45	47 46	40 37	33 24	KH KV	86 60	60 57	56 49	63 58	59 53	57 54	55 51	52 41	45 28	37 —							
556	2 200	RH RV	130 89	65 62	57 52	66 64	63 55	60 58	60 54	59 52	54 38	—	KH KV	160 116	70 67	62 56	71 67	67 60	65 63	66 60	64 57	60 42	52 42							
DN 355																														
278	1 000	RH RV	18 12	34	32	40	35	33	27	19	—	—	KH KV	33 24	40 40	40 40	42 41	37 36	39 40	36 35	28 30	14 17	—							
556	2 000	RH RV	70 47	55 53	52 47	59 55	53 49	53 50	50 47	47 47	41 38	30 26	KH KV	139 104	61 62	61 58	55 60	58 56	55 59	56 58	55 56	49 50	39 41							
833	3 000	RH RV	159 108	67	63	70	64	64	62	59	55	47	KH KV	314 232	72 73	70 67	72 69	68 67	68 67	66 70	65 67	63 64	57 58							
DN 400																														
556	2 000	RH RV	43 30	48	51	50	48	46	44	39	30	19	KH KV	67 51	55 54	58 57	52 51	51 50	54 54	51 49	46 45	37 38	24 26							
833	3 000	RH RV	97 69	61	62	60	57	57	56	55	48	39	KH KV	157 118	68 67	68 67	61 61	62 62	65 64	63 62	62 62	55 54	45 45							
1 055	3 800	RH RV	156 111	68	67	65	62	63	64	63	58	51	KH KV	256 192	75 75	74 73	66 67	67 68	70 70	69 68	70 68	65 63	56 56							
DN 500																														
833	3 000	RH RV	40 30	52	57	54	50	51	47	44	37	26	KH KV	71 53	57 57	61 62	55 54	55 54	53 53	49 49	39 41	28 29								
1 111	4 000	RH RV	73 54	61	64	61	56	58	56	55	48	39	KH KV	125 94	66 66	67 69	61 61	62 62	63 62	60 59	51 53	42 45								
1 389	5 000	RH RV	116 85	68	69	65	61	63	63	63	59	48	KH KV	194 147	73 73	71 75	66 65	66 68	68 69	70 66	67 66	60 63	53 57							
DN 630																														
1 111	4 000	RH RV	36 23	48	56	49	45	45	43	40	31	26	KH KV	46 38	53 52	61 63	55 56	50 51	50 49	48 47	45 43	36 35	31 28							
1 667	6 000	RH RV	81 51	57	63	57	53	54	52	50	46	41	KH KV	105 86	62 62	68 68	59 62	59 57	57 57	55 55	51 50	46 42								
2 222	8 000	RH RV	144 91	64	67	63	59	60	58	57	56	52	KH KV	187 152	69 69	72 70	68 66	64 62	65 62	63 64	62 60	61 51	57 51							
DN 710																														
1 389	5 000	RH RV	35 24	48	56	49	45	45	43	40	31	23	KH KV	43 35	53 53	68 63	57 56	53 51	49 50	46 48	43 43	39 34	28 25							
2 083	7 500	RH RV	86 53	58	68	61	57	53	51	52	47	39	KH KV	98 79	63 62	73 70	66 63	62 59	58 58	57 55	52 51	44 39								
2 778	10 000	RH RV	152 93	65	71	67	63	59	58	59	56	50	KH KV	176 140	70 69	76 74	72 68	68 64	64 64	63 62	61 62	55 49								
DN 900																														
1 667	6 000	RH RV	20 12	37	39	39	37	35	36	32	23	—	KH KV	43 35	53 53	68 63	57 56	53 51	49 50	46 48	43 43	39 34	28 25							
2 778	10 000	RH RV	55 35	52	55	56	52	51	47	39	24	23	KH KV	105 86	62 62	68 68	59 57	57 57	55 55	52 52	44 44									
3 889	14 000	RH RV	109 68	63	66	67	63	62	57	50	33	31	KH KV	176 140	70 69	76 74	72 68	68 64	64 64	63 62	61 62	55 49								

RH = duct connection, horizontal discharge

RV = duct connection, vertical discharge

KH = connection box, horizontal discharge

KV = connection box, vertical discharge

Adjustable radial outlet with core tube RA-V2


Features and type code

Features

- For installation flush with ceiling or freely suspended in commercial or industrial applications; also suitable for great room heights
- For turbulent mixing ventilation
- Discharge direction adjustable from horizontal to vertical (downwards)
- Adjustment of discharge direction via thermostatic control unit, electric actuator, or manual adjusting device
- Radial jet spread in cooling mode
- Shorter heating-up time due to vertical discharge in heating mode
- Air volume flow rates from 111 to 4 444 l/s [400 to 16 000 m³/h]
- Maximum temperature difference between supply air and indoor air: from -12 K when cooling to +12 K when heating
- Discharge height from 2.8 to 15 m room height, depending on nominal diameter and volume flow rate
- Perforated plate available as an option to increase the jet penetration depth
- Connection directly to circular ducts to EN 1506 or via connection box
- 8 sizes available, from DN 250 to DN 900
- Radial outlet made of powder coated sheet metal
- Vane underside flush with outlet face
- Radial outlet with circular or square face

Type code

RA-V2 — — DN — — — — —

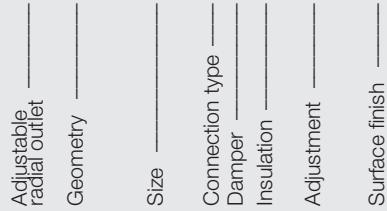

Geometry ¹⁾

- RS = circular face
Q1 = square face for square tile ceiling 600 x 600 mm
Q2 = square face for square tile ceiling 625 x 625 mm

Size

- | | | |
|--------------|--------------|--------------|
| 250 = DN 250 | 400 = DN 400 | 710 = DN 710 |
| 315 = DN 315 | 500 = DN 500 | 900 = DN 900 |
| 355 = DN 355 | 630 = DN 630 | |

Connection type

- O = no connection piece (only discharge element)
R = duct connection with rivets or screws
K = connection box (up to DN 710)
T = duct connection via crossbar

Damper

- O = no volume flow damper
R = with volume flow damper adjustable from room (up to DN 500)
S = with volume flow damper adjustable at spigot (for DN 630 and DN 710)

Insulation (for connection box)

- O = without acoustic lining
I = with acoustic lining

Adjustment

- MA = manual
E1 = „Siemens actuator, 0 – 10 V modulation“, rotation drive type GDB161.1E
E2 = „Siemens actuator, 3-point type, 24 V“, rotation drive type GDB131.1E
E3 = „Siemens actuator, 3-point type, 230 V“, rotation drive type GDB331.1E
E4 = „Belimo actuator, 0 – 10 V modulation“, rotation drive type LM24A-SR
E5 = „Belimo actuator, 3-point type, 24 V“, rotation drive type LM24A
E6 = „Belimo actuator, 3-point type, 230 V“, rotation drive type LM230A
T1 = thermostatic control unit, 20 – 28 °C
T2 = thermostatic control unit, 16 – 28 °C

Surface finish

- 9010 = face painted to RAL 9010, semi-matt
.... = face painted to RAL

¹⁾ Square face only up to DN 400

Adjustable radial outlet with core tube RA-V2

Tender text

Tender text

..... units

Adjustable radial outlet with core tube for air distribution from great heights and high-quality indoor air flow with high-induction radial air jets, discharge direction adjustable from horizontal to vertical (downwards),

consisting of:

outlet element with slanting exit, radial vanes – vane underside flush with outlet face –, and core tube with jet straightener and adjustable damper for adjustment of discharge direction, either with circular face or with square face ¹⁾ with all-side turn-up for installation in square tile ceilings 600 x 600 mm or 625 x 625 mm, as well as with top spigot for outlet connection to ducts to EN 1506 or to connection box.

The discharge direction can be adjusted optionally via a manual adjusting device, an electric actuator or, without auxiliary energy, via a self-acting thermostatic control unit.

Connection to the duct system either directly to a circular duct, using rivets or screws or an optional crossbar, or via a low-height connection box ²⁾ with lateral connection spigot and bottom sleeve, inner crossbar for outlet fastening, and bores for suspension; connection box optionally fitted with acoustic lining and volume flow damper adjustable from room (up to DN 500) or at connection spigot (for DN 630 and DN 710).

Material:

- Radial outlet made of sheet metal powder coated to RAL
- Connection box made of galvanized sheet metal

Make:

Krantz Components

Type:

RA-V2 __ - DN __ - ___ - ___ - ___

Subject to technical alterations.

¹⁾ Square face only up to DN 400

²⁾ Connection box for size DN 900 on request



Caverion Deutschland GmbH

Krantz Components

Uersfeld 24, 52072 Aachen, Germany

Phone: +49 241 441-1

Fax: +49 241 441-555

info.komponenten@krantz.de

www.krantz.de

A trademark of Caverion